# AirByDesign 5.58



Smart, Highly Efficient HEPA Air Purifier | Pro



Indoor Air Quality is a hot topic today, and for good reason. Although indoor air quality has always been important, **AirByDesign** understands that providing clean and safe indoor air is vital, perhaps now more than ever, to families, businesses, and communities.

Our board-certified **AirByDesign** air purifiers use only the latest in air filtration technology to provide solutions to improve your building's indoor air quality. We've designed a product for every indoor environment including high-density spaces like offices and classrooms, and small, low-traffic spaces like homes and hotel rooms. Each of our purifiers is equipped with the same layers of control. A HEPA filter (99.97% effective), a carbon filter, UV-C lighting, and plasma.

These controls reduce and eliminate harmful viruses, dust, allergens, other contaminants, and even unpleasant odors. So, take a deep breath and trust that your building's occupants are breathing the cleanest, and safest, air possible.

## Standing Unit | Pro





#### What's Included?

- MERV8 Pre-Filter
- HEPA Filter (99.97% Effective)
- Volatile Organic Compound (VOC) Filter
- UVC Lighting/Odor Control

#### **Additional Features**

- Wall anchors
- Casters with brakes
- Aluminum panel exterior (available in various colors)
- Baffles to reduce noise from system
- IR Remote Control
- Humidification Controls (Optional)
- Outside Air Intake (Optional)

# Layers of Controls




Merv 11 Pre Filter



Photo Catalyst Filter



UV-C Lamp




Activated Carbon



H<sub>13</sub> HEPA



## Operation | Pro

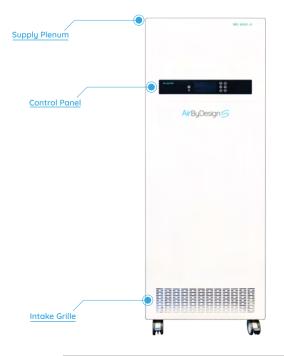



#### **Control Panel**

The state-of-the-art control panel makes viewing the status and modifying the settings of your Pro easy.



#### Intake Grille

Indoor air is pulled through the bottom intake grille for purification.



#### Supply Plenum

Sterilized and purified air passes through a final filter then to the top discharge grille and into



#### Pre-Filter

The MERV8 Pre-Filter removes particles sized 3 microns and larger.



#### **Photo Catalyst Filter**

The Photo Catalyst Filter effectively kills bacteria, viruses, fungi, and other potentially harmful microorganisms.



#### **UV-C Lamp**

36W UV-C germicidal lamps further destroy bacteria and viruses in the air.




#### **Activated Carbon**

The Activated Carbon Filter is a large capacity filter with fast absorption and desorption speeds.



#### **HEPA Filter**

The H13 HEPA Filter is up to 99.97% efficient at removing the remaining particulate from the air.

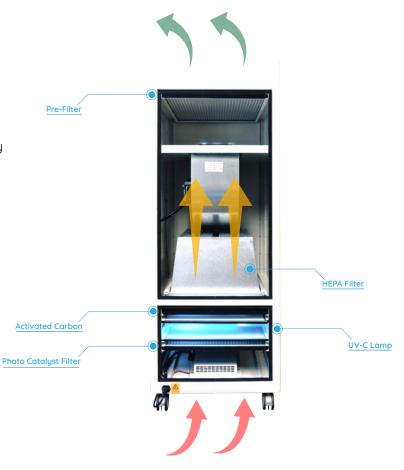



## **Dimensions and Specifications | Pro**







### AirByDesign Pro (H13 HEPA + UV)

Electrical	V/Hz/Ph	120 / 60 / 1
Connection	Туре	3-Prong 120V plug with 6' wire
Airflow (CFM)	H/M/L	1,000 / 800 / 650
Max Power Usage	Watts	260
Sound Level dBA	H - L Range	60 - 48
Main Filter	Type	H13 HEPA 99.97% Efficiency
Pre-Filter	Туре	MERV 8
Additional Filter	Туре	Activated Carbon
Controls	Туре	Advanced Control Panel
Dimensions	HxWxD	66" x 24.6" x 17.7"
Cabinet	Material	Powder Coated Steel
Weight	Lbs	148

The AirByDesign Pro is a low-profile way to ensure you and your building's occupants are breathing clean, safe air. With a HEPA air scrubber designed to remove indoor particles as small as 0.3 micrometers in diameter and a 99.97% efficient H13 HEPA filter, the Pro effectively purifies indoor air while maintaining a low operating sound level despite a high-efficiency motor.

Typical Indoor Environment Applications:

- Classrooms
- Healthcare Offices (Physicians, Dentists, Massage Therapists, etc.)
- Hotels
- Motels
- Independent Care Facilities
- Retail Stores
- Modular Buildings
- Student Housing





# **Unit Air Changes | Pro**

	Room Width (Feet)																
		20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50
	20	15.0	13.6	12.5	11.5	10.7	10.0	9.4	8.8	8.3	7.9	7.5	7.1	6.8	6.5	6.3	6.0
	22	13.6	12.4	11.4	10.5	9.7	9.1	8.5	8.0	7.6	7.2	6.8	6.5	6.2	5.9	5.7	5.5
	24	12.5	11.4	10.4	9.6	8.9	8.3	7.8	7.4	6.9	6.6	6.3	6.0	5.7	5.4	5.2	5.0
	26	11.5	10.5	9.6	8.9	8.2	7.7	7.2	6.8	6.4	6.1	5.8	5.5	5.2	5.0	4.8	4.6
⊋	28	10.7	9.7	8.9	8.2	7.7	7.1	6.7	6.3	6.0	5.6	5.4	5.1	4.9	4.7	4.5	4.3
eet)	30	10.0	9.1	8.3	7.7	7.1	6.7	6.3	5.9	5.6	5.3	5.0	4.8	4.5	4.3	4.2	4.0
<u> </u>	32	9.4	8.5	7.8	7.2	6.7	6.3	5.9	5.5	5.2	4.9	4.7	4.5	4.3	4.1	3.9	3.8
Ιŧ	34	8.8	8.0	7.4	6.8	6.3	5.9	5.5	5.2	4.9	4.6	4.4	4.2	4.0	3.8	3.7	3.5
Depth	36	8.3	7.6	6.9	6.4	6.0	5.6	5.2	4.9	4.6	4.4	4.2	4.0	3.8	3.6	3.5	3.3
	38	7.9	7.2	6.6	6.1	5.6	5.3	4.9	4.6	4.4	4.2	3.9	3.8	3.6	3.4	3.3	3.2
Room	40	7.5	6.8	6.3	5.8	5.4	5.0	4.7	4.4	4.2	3.9	3.8	3.6	3.4	3.3	3.1	3.0
"	42	7.1	6.5	6.0	5.5	5.1	4.8	4.5	4.2	4.0	3.8	3.6	3.4	3.2	3.1	3.0	2.9
	44	6.8	6.2	5.7	5.2	4.9	4.5	4.3	4.0	3.8	3.6	3.4	3.2	3.1	3.0	2.8	2.7
	46	6.5	5.9	5.4	5.0	4.7	4.3	4.1	3.8	3.6	3.4	3.3	3.1	3.0	2.8	2.7	2.6
	48	6.3	5.7	5.2	4.8	4.5	4.2	3.9	3.7	3.5	3.3	3.1	3.0	2.8	2.7	2.6	2.5
	50	6.0	5.5	5.0	4.6	4.3	4.0	3.8	3.5	3.3	3.2	3.0	2.9	2.7	2.6	2.5	2.4
						AC/F	l with U	nit on I	ligh Sp	eed, wi	th a 10	Foot Co	eiling				

								Ro	om Wi	dth (Fe	et)						
		20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50
	20	12.0	10.9	10.0	9.2	8.6	8.0	7.5	7.1	6.7	6.3	6.0	5.7	5.5	5.2	5.0	4.8
	22	10.9	9.9	9.1	8.4	7.8	7.3	6.8	6.4	6.1	5.7	5.5	5.2	5.0	4.7	4.5	4.4
	24	10.0	9.1	8.3	7.7	7.1	6.7	6.3	5.9	5.6	5.3	5.0	4.8	4.5	4.3	4.2	4.0
	26	9.2	8.4	7.7	7.1	6.6	6.2	5.8	5.4	5.1	4.9	4.6	4.4	4.2	4.0	3.8	3.7
t)	28	8.6	7.8	7.1	6.6	6.1	5.7	5.4	5.0	4.8	4.5	4.3	4.1	3.9	3.7	3.6	3.4
eet)	30	8.0	7.3	6.7	6.2	5.7	5.3	5.0	4.7	4.4	4.2	4.0	3.8	3.6	3.5	3.3	3.2
ı (F	32	7.5	6.8	6.3	5.8	5.4	5.0	4.7	4.4	4.2	3.9	3.8	3.6	3.4	3.3	3.1	3.0
pth	34	7.1	6.4	5.9	5.4	5.0	4.7	4.4	4.2	3.9	3.7	3.5	3.4	3.2	3.1	2.9	2.8
Del	36	6.7	6.1	5.6	5.1	4.8	4.4	4.2	3.9	3.7	3.5	3.3	3.2	3.0	2.9	2.8	2.7
٤	38	6.3	5.7	5.3	4.9	4.5	4.2	3.9	3.7	3.5	3.3	3.2	3.0	2.9	2.7	2.6	2.5
Room	40	6.0	5.5	5.0	4.6	4.3	4.0	3.8	3.5	3.3	3.2	3.0	2.9	2.7	2.6	2.5	2.4
ш.	42	5.7	5.2	4.8	4.4	4.1	3.8	3.6	3.4	3.2	3.0	2.9	2.7	2.6	2.5	2.4	2.3
	44	5.5	5.0	4.5	4.2	3.9	3.6	3.4	3.2	3.0	2.9	2.7	2.6	2.5	2.4	2.3	2.2
	46	5.2	4.7	4.3	4.0	3.7	3.5	3.3	3.1	2.9	2.7	2.6	2.5	2.4	2.3	2.2	2.1
	48	5.0	4.5	4.2	3.8	3.6	3.3	3.1	2.9	2.8	2.6	2.5	2.4	2.3	2.2	2.1	2.0
	50	4.8	4.4	4.0	3.7	3.4	3.2	3.0	2.8	2.7	2.5	2.4	2.3	2.2	2.1	2.0	1.9
		AC/H with Unit on Medium Speed, with a 10 Foot Ceiling															

								Ro	om Wi	dth (Fe	et)						
		20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50
	20	9.8	8.9	8.1	7.5	7.0	6.5	6.1	5.7	5.4	5.1	4.9	4.6	4.4	4.2	4.1	3.9
	22	8.9	8.1	7.4	6.8	6.3	5.9	5.5	5.2	4.9	4.7	4.4	4.2	4.0	3.9	3.7	3.5
	24	8.1	7.4	6.8	6.3	5.8	5.4	5.1	4.8	4.5	4.3	4.1	3.9	3.7	3.5	3.4	3.3
	26	7.5	6.8	6.3	5.8	5.4	5.0	4.7	4.4	4.2	3.9	3.8	3.6	3.4	3.3	3.1	3.0
⊋	28	7.0	6.3	5.8	5.4	5.0	4.6	4.4	4.1	3.9	3.7	3.5	3.3	3.2	3.0	2.9	2.8
eet)	30	6.5	5.9	5.4	5.0	4.6	4.3	4.1	3.8	3.6	3.4	3.3	3.1	3.0	2.8	2.7	2.6
pth (F	32	6.1	5.5	5.1	4.7	4.4	4.1	3.8	3.6	3.4	3.2	3.0	2.9	2.8	2.6	2.5	2.4
	34	5.7	5.2	4.8	4.4	4.1	3.8	3.6	3.4	3.2	3.0	2.9	2.7	2.6	2.5	2.4	2.3
Del	36	5.4	4.9	4.5	4.2	3.9	3.6	3.4	3.2	3.0	2.9	2.7	2.6	2.5	2.4	2.3	2.2
Įξ	38	5.1	4.7	4.3	3.9	3.7	3.4	3.2	3.0	2.9	2.7	2.6	2.4	2.3	2.2	2.1	2.1
Room	40	4.9	4.4	4.1	3.8	3.5	3.3	3.0	2.9	2.7	2.6	2.4	2.3	2.2	2.1	2.0	2.0
"	42	4.6	4.2	3.9	3.6	3.3	3.1	2.9	2.7	2.6	2.4	2.3	2.2	2.1	2.0	1.9	1.9
	44	4.4	4.0	3.7	3.4	3.2	3.0	2.8	2.6	2.5	2.3	2.2	2.1	2.0	1.9	1.8	1.8
	46	4.2	3.9	3.5	3.3	3.0	2.8	2.6	2.5	2.4	2.2	2.1	2.0	1.9	1.8	1.8	1.7
	48	4.1	3.7	3.4	3.1	2.9	2.7	2.5	2.4	2.3	2.1	2.0	1.9	1.8	1.8	1.7	1.6
	50	3.9	3.5	3.3	3.0	2.8	2.6	2.4	2.3	2.2	2.1	2.0	1.9	1.8	1.7	1.6	1.6
	, and the second				•	AC/I	ا with ل	Jnit on	Low Sp	eed, wi	th a 10	Foot Ce	eiling				